



**No Loading Dock
...No Problem!**



YARD RAMP = JOB DONE

- **50,000 lb. Capacity** - Steel Tubing Sub-frame for Max Durability
- **Smooth Loading** - 4 Adjustable Approach Flaps
- **Versatile Height** - Adjustable Stabilizers (33 in. to 51 in.)
- **Max Slip Resistance** - Heavy Gauge Expanded Metal Ramp Deck
- **Peace of Mind** - Trailer Securement Chains and Chain Pockets / Safety Yellow

Standard Features

- (4) Adjustable 24" Steel Approach Flaps
- (2) Sets of Adjustable 50,000 lb. Stabilizers (Adjustable 33 in. - 51 in.)
- Hi/Low Gears for Hand Crank Stabilizers
- Heavy Gauge Expanded Metal Over Steel Tubing
- 25' Ramp Length
- (2) 10' Chains for Securement to Trailer
- Right & Left Side Securement Chain Pockets
- Painted Safety Yellow



Yard Ramp Specifications


| | |
|---------------------|--------------------------------------|
| Load Rating* | 50,000 lbs. |
| Length | 25' |
| Width | 120" |
| Height (Adjustable) | 33" to 51" |
| Total Weight** | 7,800 lbs. |
| Steel Crossmembers | 6" Wide Flange I-Beam on 18" Centers |

*Platform load rating is within a 10' area, and is based on equally distributed load.

**Total weight is approximate, and varies based on deck construction

Optional Features

- Tungsten Plank Wood Decking Over Steel Tubing Construction
- Roller Kit for Yard Transport

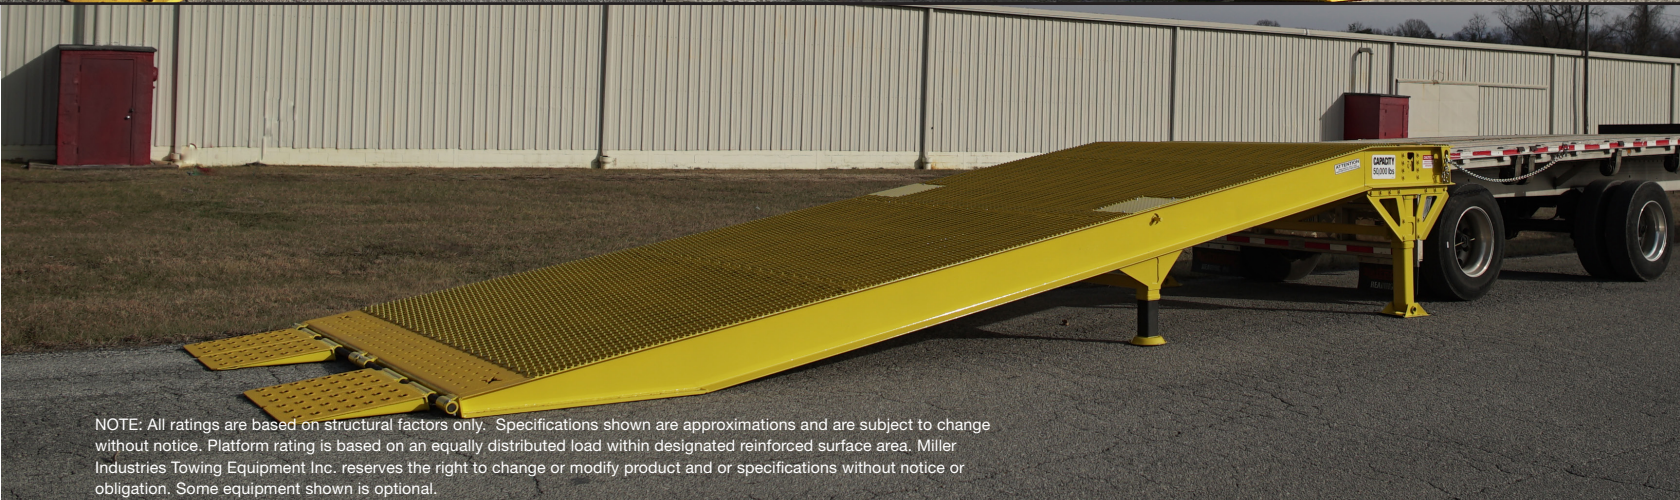

NOTE: All ratings are based on structural factors only. Specifications shown are approximations and are subject to change without notice. Platform rating is based on an equally distributed load within designated reinforced surface area. Miller Industries Towing Equipment Inc. reserves the right to change or modify product and or specifications without notice or obligation. Some equipment shown is optional.